


YODER ★ SMOKERS

A90488 & A90489

Pellet Smoker PROCEDURE FOR UPDATING


THE CONTROLLER PROGRAM

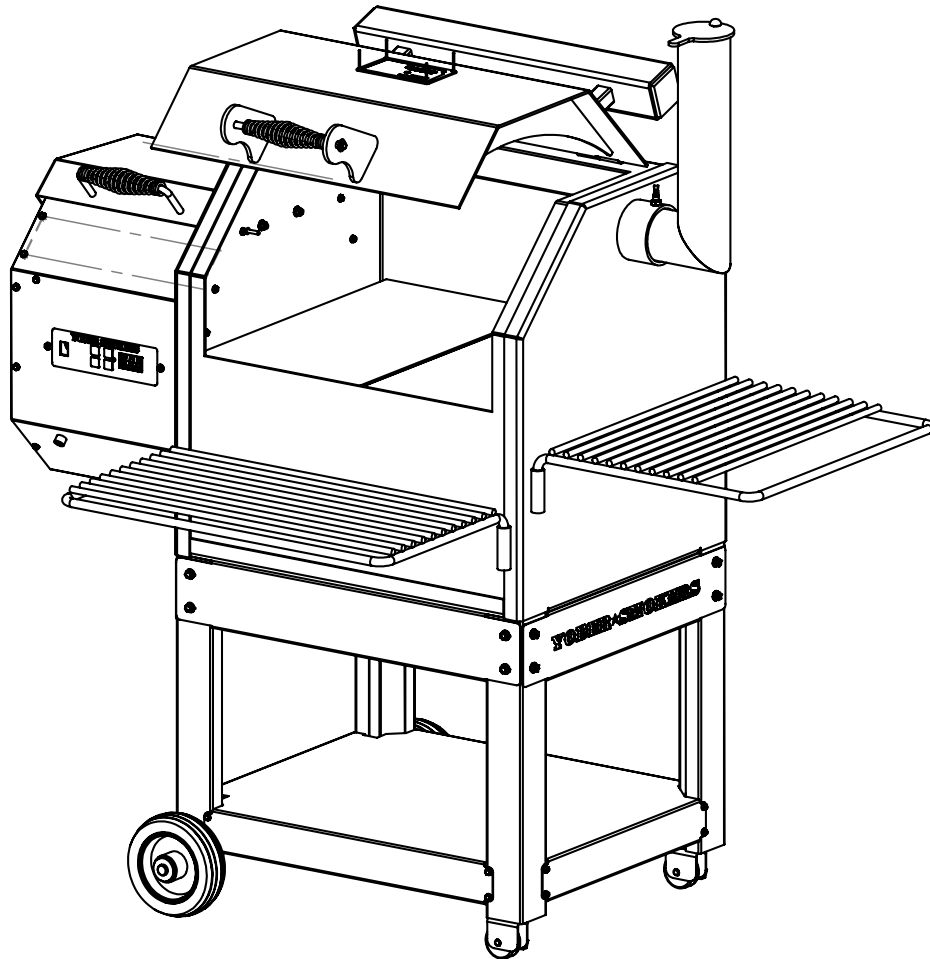


Procedure for updating the controller program:

! CAUTION: BEFORE BEGINNING THIS PROCEDURE, INSURE THAT THE POWER CORD TO THE SMOKER IS DISCONNECTED! FAILING TO DO SO MAY RESULT IN BODILY INJURY.


1. Remove eleven screws securing the hopper end (fan) panel, then pull out panel.

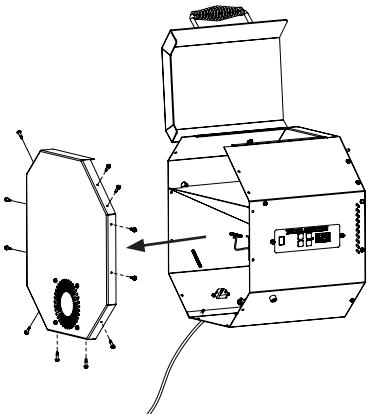


4. Pull out control panel and box.

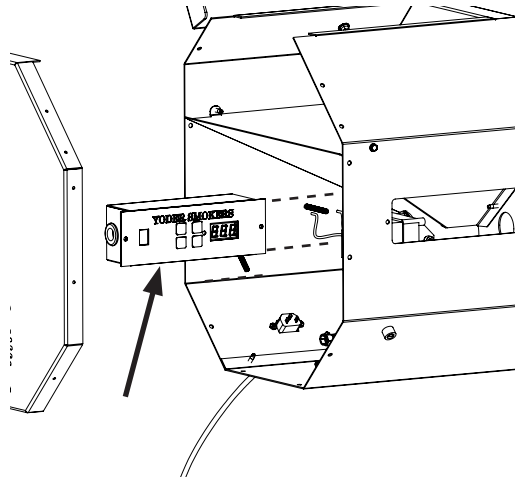


2. Disconnect two wires (one green, one white) from the fan.

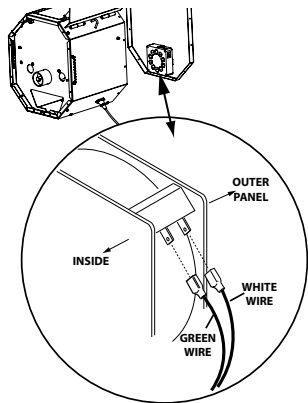


5. Open the programming kit containing a Ribbon Cable and a Programming device.

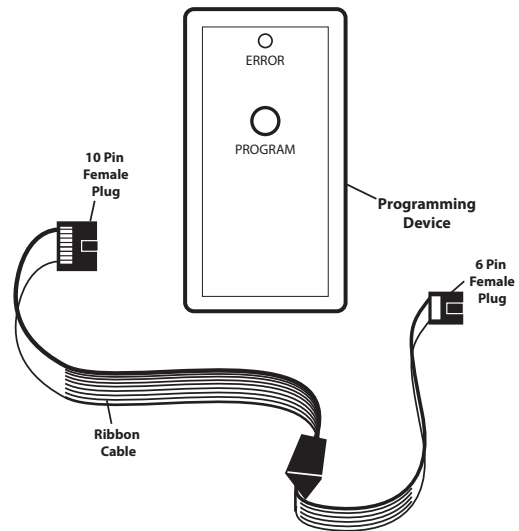


3. Remove two front panel screws.

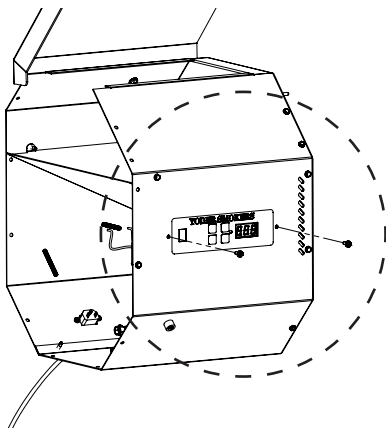

- First, insert the 6 pin female plug of the ribbon cable onto the 6 pin terminal block of the control box circuit board. Correct orientation is with the red wire of the cable "up", as shown (wire closest to blue transformer)

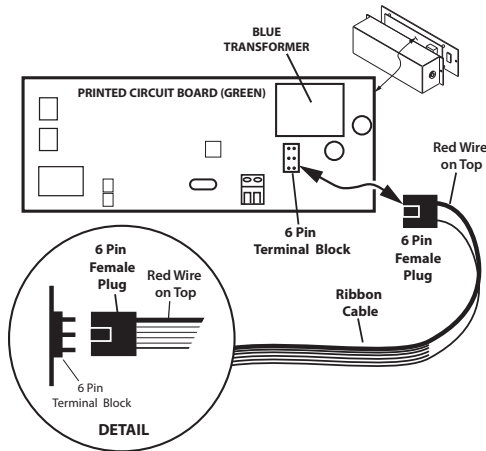


- Next, insert the 10 Pin female plug of the ribbon cable into the 10 Pin socket of the Programming Device.

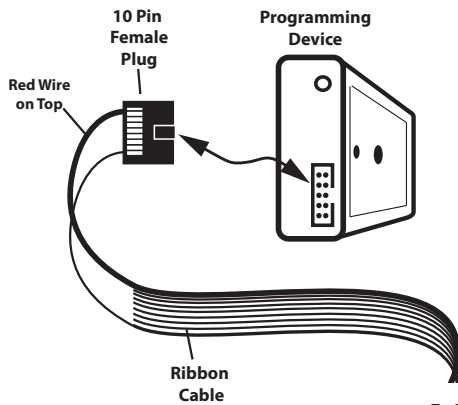


- If both ends of the ribbon cable have been correctly installed (the circuit board 6 pin connection must always be made first), the LED light labeled "Error" will flash Green, then go off. If Error light flashes Red, then the cable has a bad connection and must be disconnected from both the programming device and the circuit board, then repeat steps 6-7. A Red Error light may also indicate a weak battery in the programming device (replace with a standard 9 volt battery).


- Press and release "PROGRAM" button to initiate update. Green "Error" light will blink rapidly several times then blink slowly. When light ceases to flash, the update process is complete.




- Reinstall control box into front of pellet hopper using two screws.

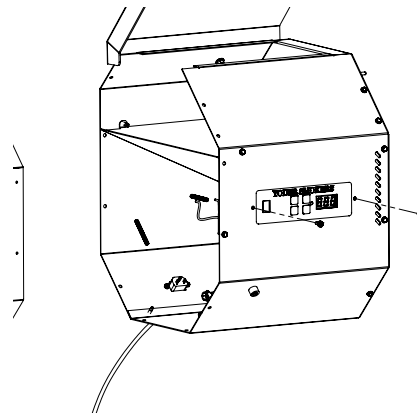

- Reconnect wiring spade terminals to fan.

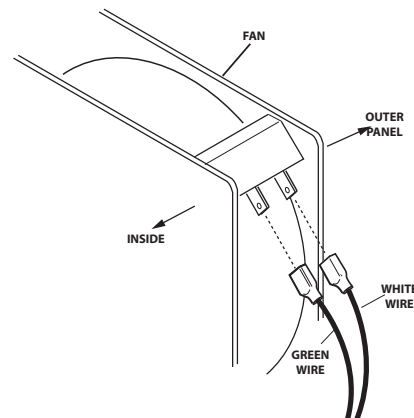

12. Re-install hopper end panel using 11 screws.

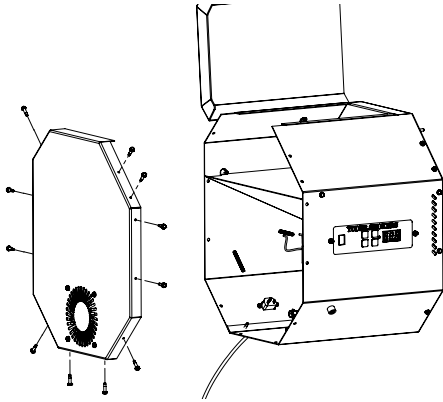

End of Procedure.