


## CERAMIC IGNITER REPLACEMENT



### TOOLS YOU'LL NEED

5/16" SOCKET | SMALL SOCKET EXTENSION | RATCHET

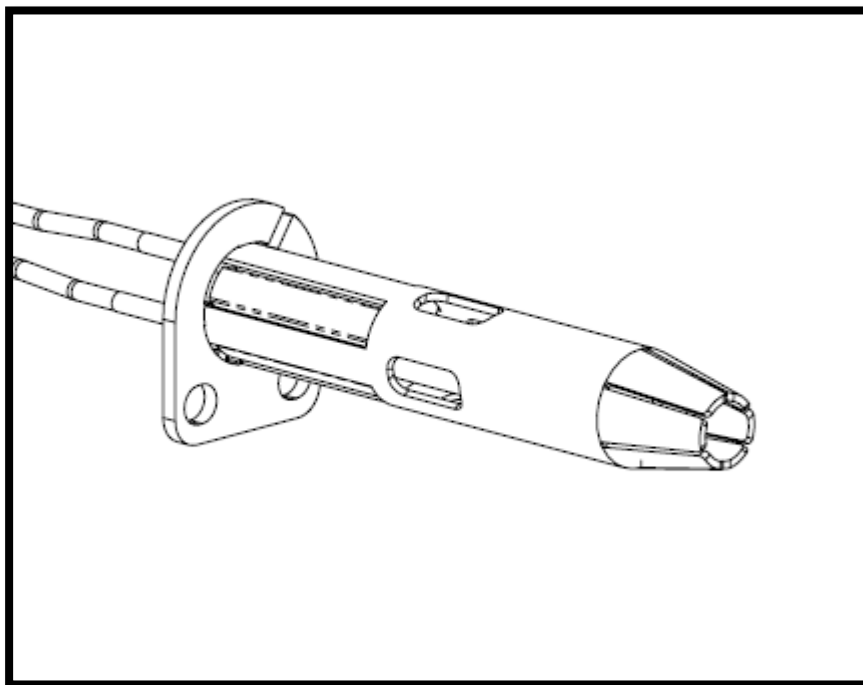

**UNPLUG**  
POWER CORD



**REMOVE**  
COOKING GRATES




**REMOVE**  
HEAT DIFFUSER




**CAUTION:** BEFORE BEGINNING THIS PROCEDURE, ENSURE THAT THE POWER CORD TO THE SMOKER IS DISCONNECTED! FAILING TO DO SO MAY RESULT IN BODILY INJURY.

**COMPETITION CART MODELS REQUIRE UNPLUGGING THE POWER CORD FROM THE HOPPER LOCATED UNDER THE CART.**


1. Remove the burn grate from the firepot.

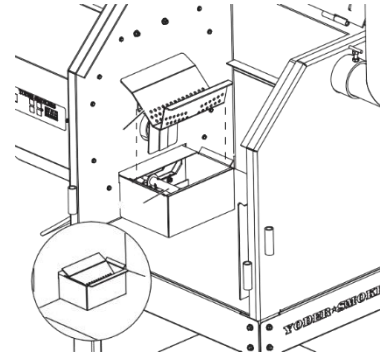


2. Use the 5/16" socket and extension to remove the igniter housing from the chamber wall.

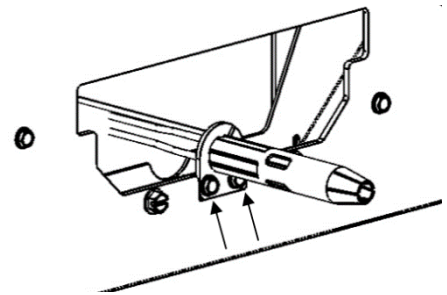


3. Pull the wires out of the opening to the hopper to expose the electrical connector. Pull apart the electrical connector for the igniter

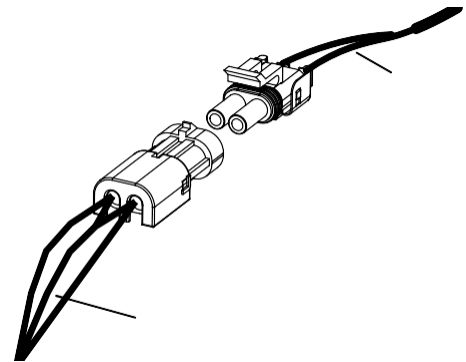


4. Use the 5/16" socket and extension to secure the new ceramic igniter housing to the chamber wall.

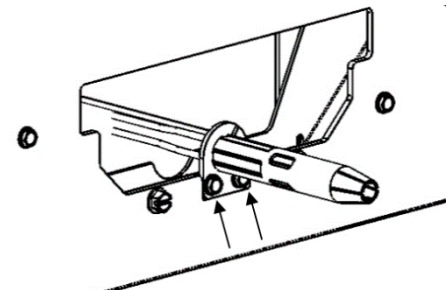

5. Attach igniter cable at electrical connector. Tuck the wire back inside the hopper away from firepot.

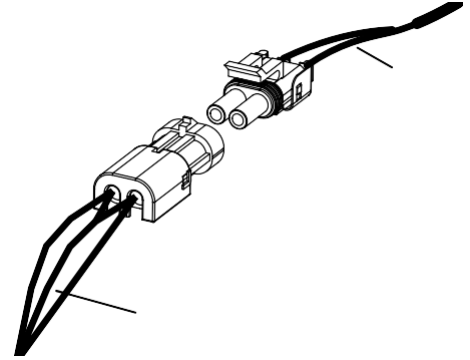

6. Once you have the igniter secured to the chamber, make sure the tube is locked in place by grabbing the tube and turning it clockwise

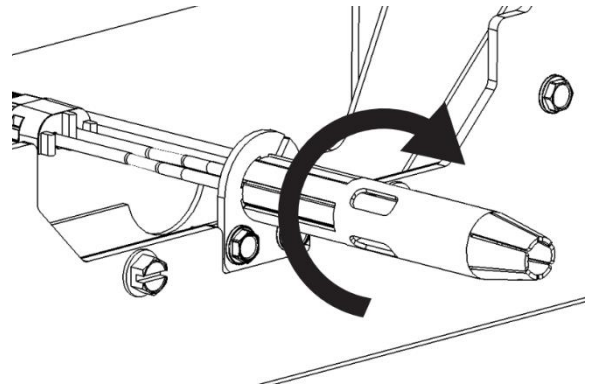

# THIS COMPLETES THE HARDWARE INSTALL



**FOR PRODUCT SUPPORT:**

877.409.6337 (Ext. 2)

customerservice@yodersmokers.com

**WWW.YODERSMOKERS.COM**